

PMT200

DC Power User Manual



DESCRIPTION

The PMT 200 is a medium wireless power solution up to 40W and can be tailored to fit specific product requirements based on SmartInductive™ Technology. The solutions supply the power, magnetics, and interface to meet customer product requirements. The solutions deliver pinnacle flexibility, safety, and cost-efficiency for a 100% wireless life.


FEATURES

- Up to 40W wireless power transfer
- Up to 50mm coil to coil distance
- Up to 40mm lateral misalignment
- Advanced battery charging algorithm
- Optimizing power transfer efficiency in low power mode
- Software based DC-to-DC functionality
- In-band communication (WPT management and proprietary host system communication)
- Enhanced Foreign Object Detection (FOD)
- Operation frequency 100-300KHz
- Cost-effective: Software-based wireless power transfer and communication algorithms

APPLICATIONS

- Industrial robotics
- Power Tools
- IoT
- Drone
- Medical devices

FUNCTIONAL BLOCK DIAGRAM

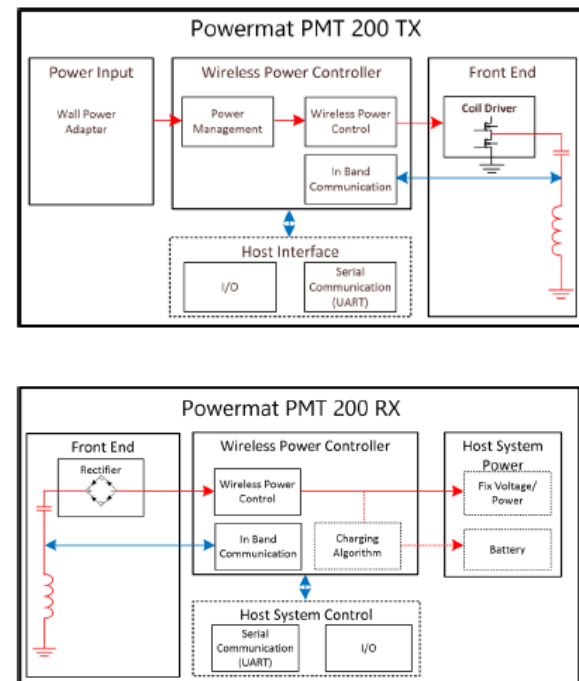

Powercast products and technology are covered by one or more patents with other patents pending. All patent and trademark information can be found at <http://www.powercastco.com/IP/>.

SPECIFICATIONS

Feature	Specification	Note
Wireless Power Transfer		
Coil size (Symmetric Rx, Tx, coil)	30/40/70/130mm	Optional customization
Max charge power	40W	Battery charging/fixed voltage
Coil to coil distance*	50mm (130mm coil) 30mm (70mm coil) 15mm (40mm coil) 10mm (30mm coil)	SmartInductive™ Technology mid-range coupling
Coil lateral misalignment (X/Y)*	40mm (130mm coil) 30mm (70mm coil) 15mm (40mm coil) 10mm (30mm coil)	SmartInductive™ Technology mid-range coupling
Efficiency	>90%	Peak end-to-end
Operation Frequency	100KHz-300KHz	
Interface (optional)		
Host Interface	IO/UART (LVTTTL)	Digital I/O with customizable functionality
Battery Management		
Battery charging	CCCV	1-7 li-Ion cells 1-8 LiFePO ₄ cells 12V/24V lead-acid battery
Battery voltage	Up to 30V on Rx module	Software controlled DCDC over the inductive link
Maximum charge current	10A	
Fuel gauging		Software algorithm
Battery protection	OV, OC, OT, UT	Software algorithm
PCB Dimensions		
PCB Dimensions	35 x 35mm/ 32 x 32mm	Can be customized
Environmental		
Operating	0°C ~ 70°C	
Storage	-40°C ~ 85°C	

*Coil distance and lateral misalignment are coil size dependent

IMPORTANT NOTICES

Information furnished by Powercast Corporation (Powercast) is believed to be accurate and reliable. However, no responsibility is assumed by Powercast for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice.

No license is granted by implication or otherwise under any patent or patent rights of Powercast. Trademarks and registered trademarks are the property of their respective owners.

CRITICAL APPLICATIONS DISCLAIMER

POWERCAST PRODUCTS (INCLUDING HARDWARE AND/OR SOFTWARE) ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, FAULT TOLERANT OR FOR USE IN ANY APPLICATION THAT COULD LEAD TO DEATH, PERSONAL INJURY OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE (INDIVIDUALLY AND COLLECTIVELY, "CRITICAL APPLICATIONS"), SUCH AS LIFE-SUPPORT OR SAFETY DEVICES OR SYSTEMS, CLASS III MEDICAL DEVICES, NUCLEAR FACILITIES, APPLICATIONS THAT AFFECT CONTROL OF A VEHICLE OR AIRCRAFT, APPLICATIONS RELATED TO THE DEPLOYMENT OF AIRBAGS, OR ANY OTHER CRITICAL APPLICATIONS. CUSTOMER AGREES, PRIOR TO USING OR DISTRIBUTING ANY SYSTEMS THAT INCORPORATE POWERCAST PRODUCTS, TO THOROUGHLY TEST THE SAME FOR SAFETY PURPOSES. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF POWERCAST PRODUCTS IN CRITICAL APPLICATIONS, SUBJECT ONLY TO APPLICABLE LAWS AND REGULATIONS GOVERNING LIMITATIONS ON PRODUCT LIABILITY.

Powercast warrants its products in accordance with Powercast's standard warranty available at www.powercastco.com/terms-conditions



Powercast Corporation

620 Alpha Drive
Pittsburgh, PA, USA 15238
www.powercastco.com
contact@powercastco.com
+1 (412)-455-5800